

9861

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93



9861 Series
Mass Flow Controller/Meters

9861 Series

Metal Sealed, Digital, High Temperature Mass Flow Controllers & Meters for Gases & Liquids



Originally developed by Unit Instruments (later Celerity Inc.), the 9861 Series of high temperature mass flow controllers and meters continue to be manufactured using the same supply chain and copy exact process by Brooks Instrument who acquired the IP and assets of Celerity Inc. in 2009. The 9861 Series remains the optimum choice for critical precursor and dopant vapor delivery in semiconductor and optical fiber manufacturing. The 9861 Series are thermal mass flow controllers and meters designed for challenging high temperature delivery of condensable precursors and dopants.

A high purity, high leak integrity metal flow path ensures compatibility with all process gases and vapors. The patented IsoSensor™ is a high stability flow sensor compatible with the elevated environmental temperatures found in heated gas lines and baking systems (temperature-controlled gas boxes). The ultra-low drift performance of the IsoSensor reduces the need for frequent re-zeroing and recalibration typical in high temperature applications.

For maximum flexibility and inventory reduction, the 9861 Series remote electronics come standard with two analog electrical connectors (a 20 pin card edge and a 9 or a 15 pin "D" connector option) and Semi industry standard RS485 digital communication enabling easy retrofit and standardization.

In mass flow controller models, a diaphragm free solenoid control valve provides a wide dynamic control range for superior precision and control. Designed for long-term reliability, the valve has been marathon tested to over 8 million cycles with no degradation in performance.

Features	Benefits
High temperature mass flow controller	Reliable delivery of condensable gases and precursors
Digital measurement and control architecture	Enhanced accuracy and process control
Ultra-High purity flow path	Ensures integrity and purity of gas/vapor
Ultra-stable flow measurement sensor	Reduced maintenance for superior uptime and lowest cost of ownership
Upstream pressure buffering (optional)	Stable mass flow delivery under challenging supply conditions
All metal diaphragm free control valve	Enhanced long-term reliability
Dual I/O interfaces	Universal upgrade enabling standardization and inventory reduction

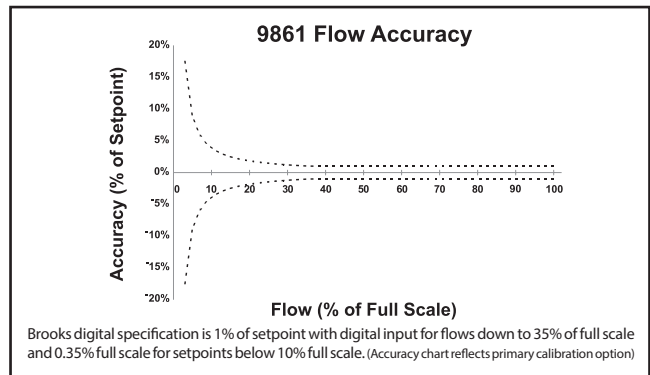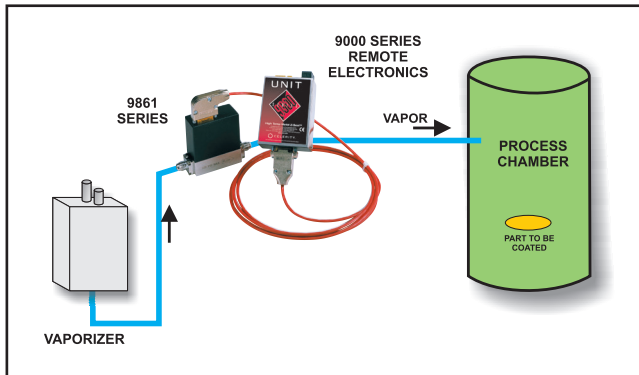

Product Dimensions

Fitting type	Overall	Inlet	Outlet
1/4" VCR Male	4.88 in./124.0 mm	0.94 in./23.9 mm	0.94 in./23.9 mm

15 pin "D" connector standard

Top label includes model, range, gas + serial number

Access for zero adjustment

Calibration data label

Serial number label

500 PSI MAX. FLOW

2 X 8-32 UNC-2B X .18(4.6) DP. mounting holes

Block part number

X.XX = dimensions in inches
[XX.X] = dimensions in millimeters

9000 Series Remote Electronics Dimensions

* Standard cable length = 3 ft.
The following lengths are available with a special request:
6.7 ft., 8 ft. & 16.5 ft.

PERFORMANCE	
Settling Time (to within 2% of setpoint)	
Fast Start	≤ 1.0 sec (per SEMI E17-91)
Soft Start	Linear 20% per sec (0 to 100% in 5 sec)
Accuracy (N ₂ equivalent)	
35% to 100% F.S.	±1% setpoint (per SEMI E56-96)
< 35% F.S.	±0.35% full scale (per SEMI E56-96)
Repeatability (full scale)	±0.15% (per SEMI E56-96)
Linearity (full scale)	±0.5% (per SEMI E27-92)
Inlet Pressure Coefficient	0.007% per psi (N ₂)
Ambient Temperature Coefficient	
Zero	0.05% full scale per °C
Span	0.1% full scale per °C
Leak Integrity	1 x 10 ⁻¹⁰ atm-cc/sec (He) (per SEMI E16-90)
Automatic Zero	Optional (customer programmable)
Zero Drift	≤ 0.6% per year without auto-zero
Thermal Siphoning and Attitude Sensitivity	< 0.1% full scale (30 psi SF ₆)
OPERATING LIMITS	
Standard Flow Range	3 sccm to 10 slm (N ₂ equivalent)
Control Range (full scale)	2-100%
Valve Leak Rate	≤1% full scale
Gases	All
Ambient Temperature Range	0-150°C (32-302°F)
Maximum Operating Pressure	620 kPa (90 psia)
Differential Operating Pressure (Typical)	1.33-350 kPa (10 torr - 50 psia)
Warm-up Period	30 minutes
Mounting Position	HOV or HOS
Valve	Normally closed solenoid
ELECTRICAL CHARACTERISTICS	
Input/Output Signal	
Setpoint Input	0-5 Vdc linearly proportional to required flow
Output Monitor	0-5 Vdc linearly proportional to flow rate
Digital Input/Output	RS485L (via RJ11 ports)
Valve Off	External: TTL signal
Auto shut-off	Setpoint < 2% full scale commands valve off
Power	
Controller (RS485)	+15 Vdc (160 mA max.), -15 Vdc (160 mA max.)
Meter (Analog)	+15 Vdc (50 mA max.), -15 Vdc (50 mA max.)
Power Consumption	9861 = 5 watts max.
MECHANICAL CHARACTERISTICS	
Surface Finish	4μ inch Ra
Fittings	1/4" VCR*, 3/8" VCR*
Valve Position	Downstream
Materials	Wetted Components: 316L SS/KM-45/304/7MO+
Weight	1.2 kg (2.65 lbs)
CALIBRATION REFERENCES	
Traceability	National Institute of Standards and Technology (N.I.S.T.)
Standard Temperature and Pressure	0°C and 760 mm Hg per (SEMI E 12-96)

C	Mass Flow Controller
M	Mass Flow Meter
9861	Ultra-High Purity, Metal Seal, RS485 Digital and Analog Interface
A	Auto Shut-off
X	No Auto Shut-off
F	Fast Start 1 Second Response
S	5 Second Linear Soft Start
T	6-10 Second Soft Start
X	No Valve (Meter)
XXXX XXXX	Specify Pre-programmed Gas and Full Scale Range (example: Nitrogen = "0013"; 90sccm= "090C")
4R	1/4" VCR
3R	3/8" VCR
HOV	Horizontal or Vertical Mounting Attitude (Standard)
HOS	Horizontal or Side
A	Atmospheric Downstream Pressure
V	Vacuum Downstream Pressure
MM	Metal O-Ring/ Metal Seat
MX	Metal O-Ring- No Valve (Meter)
T	9 Pin "D" Connector & 20 Pin Card Edge Connector & Dual RJ11 ports, 0-5 VDC
U	15 Pin "D" Connector & 20 Pin Card Edge Connector & Dual RJ11 ports, 0-5 VDC
XXXX	Customer Special Request (CSR)
C	Normally Closed (Standard)
X	No Valve (Meter)
S	Standard (Valve Downstream)
X	No Valve (Meter)
A	Auto-Zero Enabled
X	Auto-Zero Disabled
04E	4μ inch Ra Finish
000	0°C Reference Calibration (Standard)
XXX	Custom Reference Calibration (20°C=20)

Sample Model Code

C	9861	A	F	XXXX XXXX	4R	HOV	A	MM	T	XXXX	C	S	A	04E	000
---	------	---	---	-----------	----	-----	---	----	---	------	---	---	---	-----	-----

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	