

SLA7840

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

DATA SHEET

Pressure Controllers



SLA7840 Remote Transducer
Pressure/Flow Controllers

SLA7840

High-Purity, Metal Sealed, Digital, Remote Transducer Pressure/ Flow Controller

Model SLA7840 is a 1-1/8" wide profile high purity metal sealed instrument that controls pressure while measuring flow rate. The Model SLA7840 receives a remote pressure transducer signal, and using adjustable integral PID control electronics and a control valve, maintains a desired set pressure. In addition to the pressure function, the Model SLA7840 provides a 0-5 V signal that is linear with mass flow rate. The Model SLA7840 can also be configured as a mass flow controller for calibration or test purposes.

Superior Valve Technology

The co-planar valve offers unmatched performance. Due to its simplified construction, the valve exhibits superior repeatability, stability, and response time. Instruments are less sensitive to pressure variations in the process because of the larger valve control range. The co-planar valve also offers lower leak-by rates compared to other metal sealed controllers. These advancements ensure a more stable process over time.

Highly Adaptable Configurations

The 1-1/8" body offers a compact, space saving footprint. The SLA7840 is easily retrofittable to existing gas box designs that utilize the traditional 1-1/2" body platform. Likewise, the all-digital electronics is adaptable and allows the SLA7840 to serve as a direct replacement for existing analog products bringing with it greatly improved accuracy and reliability.

Broad Array of Communication Options

Brooks offers the Model SLA7840 with a traditional 0-5 volt analog option. Brooks also offers control interface with DeviceNet™, a high-speed (up to 500k baud) digital communication network. Brooks' communication capabilities and device-profiles have been certified by the ODVA (Open DeviceNet Vendor's Association). Other network protocols are in development. Talk to your Brooks representative about your specific needs.

Reduced Cost of Ownership

The Model SLA7840 allows multi-gas and multi-range capabilities to reduce customer inventory. Storage and pre-programming of up to 10 gas calibrations easily permits users to switch between different gases and ranges on a single device. Also, the greater control range provided by the co-planar valve gives users the option to decrease the number of parts needed to control their entire process.

BROOKS®
INSTRUMENT

Beyond Measure

Product Features

- 1-1/8" Mechanical Platform
- High Performance Co-Planar Valve
- All wetted parts 32 Ra maximum to maintain particle, moisture and contamination free process conditions
- All-Metal seals, High leak integrity (less than 1×10^{-10} atm-cc/sec He)
- Flow accuracy $\pm 1\%$ of rate (or setpoint), including linearity to assure device is controlling precisely at desired level
- Digital Communication options offer easy commissioning and reduced system wiring
- Device can store 10 selectable calibrations and flow ranges
- CE Compliant

Analog I/O:


- 15-pin
- 0-5 Volt setpoint and flow signals
- Single sided +15 Volt DC power supply
- Separate 'valve-override' signal
- Compatible with Brooks' Model 0254 Series secondary electronics

DeviceNet™ Communication Option:


- Easy commissioning and reduced system wiring
- Accessibility of sensor, valve, calibration, tuning, diagnostic, and other internal data, to support fast commissioning and streamlining of controller insitu preventive maintenance
- MAC-ID, Baudrate rotary switches, and two bi-color status LEDs - to ease setup and addressing as well as status confirmation
- Vendor Specific Profile, ODVA certified
- Capabilities: Poll I/O, Cyclic, Change-of-State and explicit messaging

Product Dimensions

SLA7840A Analog I/O Controller with 1/4" VCR Connections

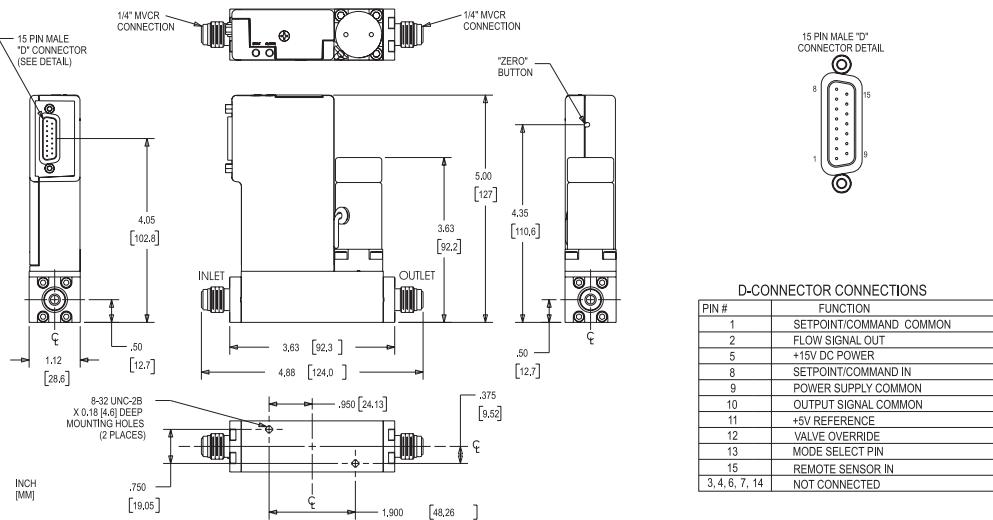

SLA7840D Digital I/O DeviceNet Controller with 1/4" VCR Connections

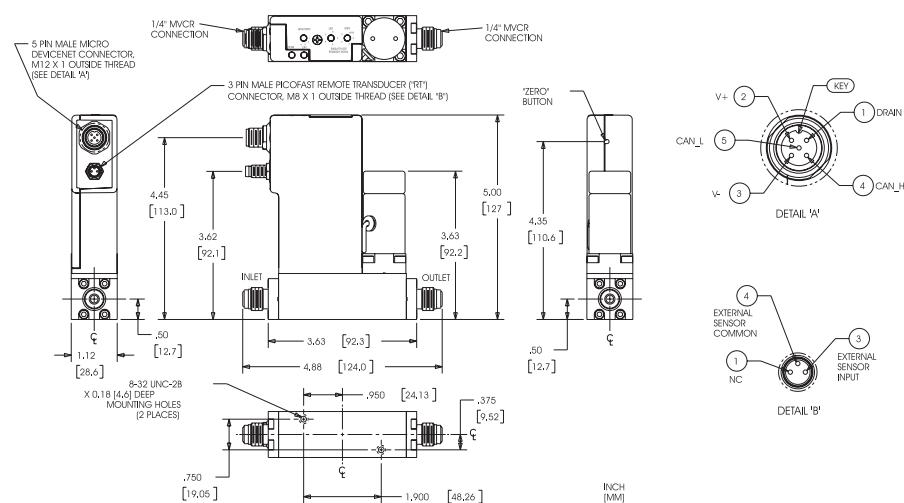

Product Specifications

PERFORMANCE		
Flow Range**	Any range from 0-3 sccm to 0-30,000 sccm N ₂ eq.	
Flow Control Range	33:1	
Flow Accuracy	±1.0% of rate, including linearity (20% to 100% F.S.), ±0.2% of F.S. (below 20% full scale)	
Flow Repeatability	±0.20% of rate	
Flow Temperature Sensitivity	Zero: Less than 0.035% F.S. per °C; Span: Less than 0.1% of rate per °C	
Flow Settling Time	Actual flow: Less than 1 second to within ±2% full scale of final value for a 0-100% step per SEMI Guideline E17-91	
Pressure Ranges	Dependent upon remote transducer, maximum 500 psig.	
External Sensor Input	Suitable for pressure sensors with maximum 0-10 Vdc output signals.	
Pressure Control Range	20:1	
Pressure Settling Time	Less than 1 second typical for a 20-100% setpoint step with maximum 2% overshoot. Actual pressure response highly dependent on system design.	
RATINGS		
Operating Pressure	500 psig maximum	
Pressure Equipment Directive (PED) 97/23/EC	Equipment falls under Sound Engineering Practice (SEP)	
Leak Integrity	Inboard to Outboard: 1x10 ⁻¹⁰ atm scc/sec Helium max.	
Ambient Temperature Limits	Operating: 0°C to 60°C (32°F to 140°F); Non-Operating: -25°C to 100°C (-13°F to 212°F)	
Fluid Temperature Limits	0°C to 65°C (32°F to 149°F)	
MECHANICAL		
Wetted Materials	316L Vacuum Arc Remelt (VAR), 316L, and high-alloy ferritic stainless steel External/internal seals: Nickel; Valve seat: 316L stainless steel - standard	
Surface Finish	32µ inch Ra maximum	
Process Connections	1/4" male VCR™ (standard); C Seal (SEMI 2787.1); CS Seal (SEMI 2787.5); W Seal (SEMI 2787.3)	
ELECTRICAL		
Electrical Connections	Analog I/O option: 15-pin D-Connector, male DeviceNet I/O option: 5-pin Micro-Connector, male	
Power Supply Voltage	Analog I/O option: +15 Vdc, ±5% (traditional -15 Vdc pin is ignored) Digital I/O DeviceNet option: 11-25 Vdc	
Power Requirements	Watts Typ. Watts Max. Analog I/O option, with valve 3.6 4.0 DeviceNet I/O option, with valve 6.9 7.6	
Setpoint Input (Analog I/O option only)	0-5 Vdc: Input will accept signals to 5.5 Vdc (110% F.S.). Input resistance: 360 Kohm min.	
Flow Output (Analog I/O option only)	0-5 Vdc into 2 Kohm minimum load. Output will indicate process variable up to 5.5 Vdc (110% F.S.).	
Valve Override Signal (Analog I/O option only)	Left floating/unconnected – instrument controls valve to command setpoint Connected to signal at or above 5.0 Volts (max. 16 Vdc) – valve is forced open Connected to signal at or below 0.0 Volts (min. -1 Vdc) – valve is forced closed	
5 Volt Reference Signal (Analog I/O option)	For use with potentiometer command setpoint input ±0.2%, into 1Kohm (minimum load)	
Mode Select Signal (Analog I/O Only)	Select whether to control in external sensor mode (pressure) or flow mode Open (disconnected) = unit operation in flow control mode Closed (grounded) = unit operation in pressure control mode	
Remote Sensor Input	0-10 Vdc: Input will accept signals to 10.2 Vdc. Input resistance = 480 Kohm nominal	

**Standard: 0° and 101kPa (760 Torr). Per SEMI Guideline E12-96.

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	